


# Radars™ ClimaPlus™

**CLIMAPLUS™**  
Non-SAG  
WARRANTY

## Medium textured panel

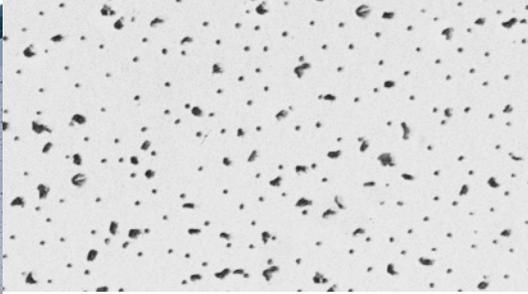

### Features and Benefits

- Non-directional pattern with a fresh, clean appearance offers fast, efficient installation.
- Select items available in Standard Colors.
- *CLIMAPLUS™* 15-year System Warranty to withstand conditions up to 104 °F (40 °C)/90% relative humidity without visible sag when used with USG's *DONN®* Brand Suspension Systems.
- Optional *FIRECODE™* formulation designed to meet life safety codes.

### Applications

- Schools
- Corridors
- Lobby areas
- Offices
- Retail stores

# Radars<sup>TM</sup> ClimaPlus<sup>TM</sup>

Acoustical Ceilings



Edge	Panel Size		Item No.  UL Classified				Color <sup>4</sup>	Grid Options	Recycled Content <sup>5</sup>	Panel Cost	
	Imperial	Metric (mm) <sup>1</sup>	Class <sup>2</sup>	Imperial	NRC	CAC Min.					LR <sup>3</sup>
	2' x2' x5/8"		Class A	2215	.55	35	.84	White	A	50%	\$
	2' x4' x5/8"	600x1200x15	Class A	2410 ME2410 <sup>1</sup>	.55	35	.84	White Standard	A	38%	\$
	2' x4' x5/8"		Class A	2415	.55	35	.84	White Flat Black	A	50%	\$
(SLT) 	2' x2' x5/8"	600x600x15	Class A	2220 ME2220 <sup>1</sup>	.55	35	.84	White Standard Flat Black not available	C	38%	\$
	2' x2' x5/8"		Class A	2225	.55	35	.84	White	C	50%	\$
	2' x4' x5/8"		Class A	2420	.55	35	.84	White	C	38%	\$
	2' x4' x5/8"		Class A	2425	.55	35	.84	White	C	50%	\$
(FLB) 	2' x2' x5/8"		Class A	2230	.55	35	.84	White	D, F, G	38%	\$
<b>RADAR CLIMA PLUS Tile</b> 	(SF) <sup>6</sup> 12" x12" x5/8"		Class A	2570	.45 <sup>7</sup>	35	.84	White	Adhesive Staple	38%	\$\$\$
<b>Grid Profile Options</b>											

**ASTM E1264 classification**  
Type III, Form 2, Pattern CD  
**ASTM E84 surface burning characteristics**  
Class A  
Flame spread: 25  
Smoke developed: 10

**Weight**  
0.69-0.81 lb./ft.<sup>2</sup> (Class A panels and tile)  
1.15 lb./ft.<sup>2</sup> (FIRECODE<sup>TM</sup> panels)  
**Thermal resistance**  
R-1.4 (5/8" panels and tile)

**Maximum backloading**  
See warranty for details.  
**Maintenance**  
Can be cleaned easily with a soft brush or vacuum.

**Footnotes**  
1. Metric available in White only.  
2. Fire-rated items: see UL design details.  
3. LR values are shown as averages.  
4. See color selectors for more information.  
5. For details, see the Recycled Content selector.  
6. SF = staple flange.  
7. Not UL Classified for acoustics.

**SAFETY FIRST!**  
Follow good safety practices. Read material safety data sheets and related literature on products before specification and/or installation.